

FBslim

LED within your exhibition structure

A 500 × 500 mm cabinet for 4040 / 4080 profile systems.

Indoor displays



Displays integrated with product presentation



Application concept

A shared structure

Display surfaces and open shelves fit into one profile-based installation.

A modular starting point

Plan the screen area in whole 500 mm cabinets, then resolve connections and supports.

Flat surfaces and 90° corners

More than a flat wall

Combine viewing faces to suit a booth, retail fixture or freestanding installation.

Connections follow the design

Confirm the profile interfaces, accessories and structural supports for each layout.




Front and rear maintenance



Service access


Front and rear access options adapt to the installation.

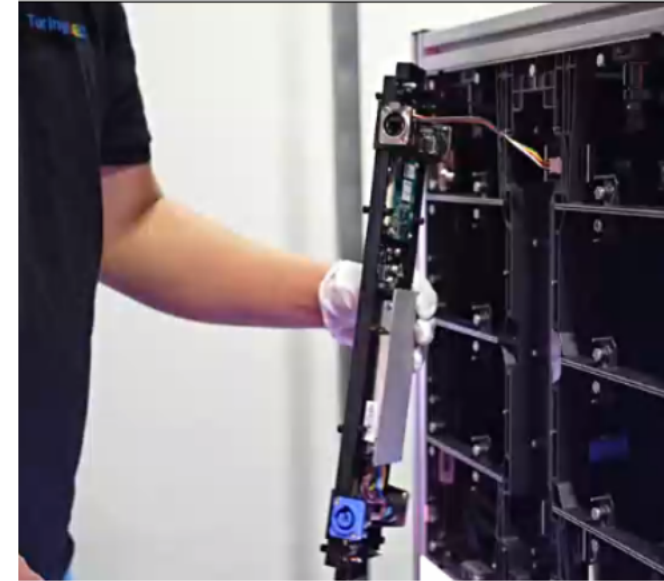

Central power box

Integrated signal and DC power connections.

Exhibition applications

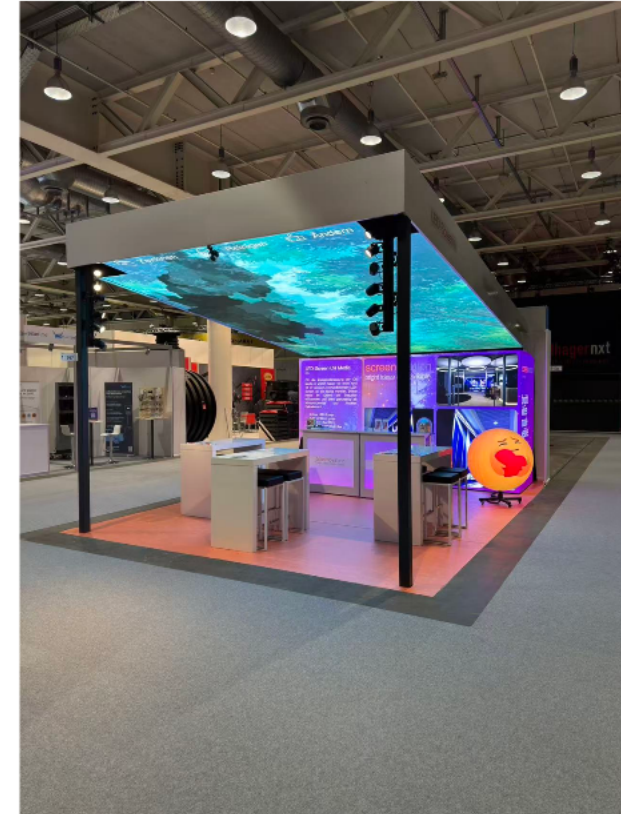

Project photography: exhibition facades and integrated booth surfaces.

Pixel pitch selection

Configuration	P1.95	P2.6	P2.9	P3.9
Cabinet pixels	256 × 256	192 × 192	168 × 168	128 × 128
Pixel density / m ²	262,144	147,456	112,896	65,536
Cabinet size	500 × 500 × 40 mm			

Standard cabinet weight: 5.7 kg. Front and rear maintenance.

Brightness and driver configuration depend on the selected version.

Your FBslim project

Space and viewing faces

Share the screen dimensions, viewing directions and a drawing of the profile structure.

Installation and service

Include the mounting method, access space and intended pixel pitch.



led@turingled.com

WhatsApp +86 15014067656