


HoloFix Film


Content on glass. A view through it.

A thin transparent LED surface for fixed indoor glass installations.

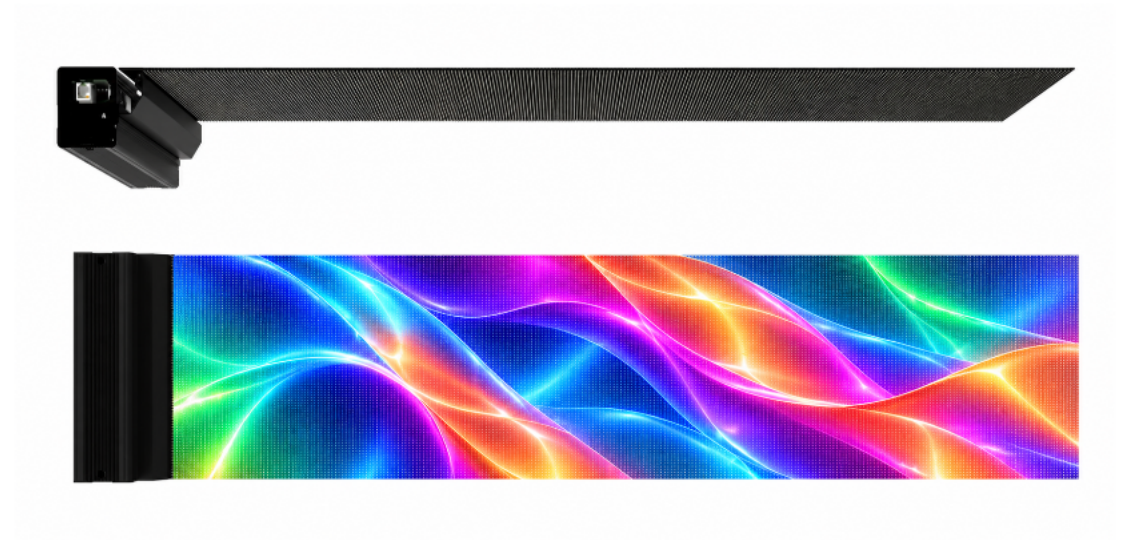

Glass integration

Integrate with the glazed surface

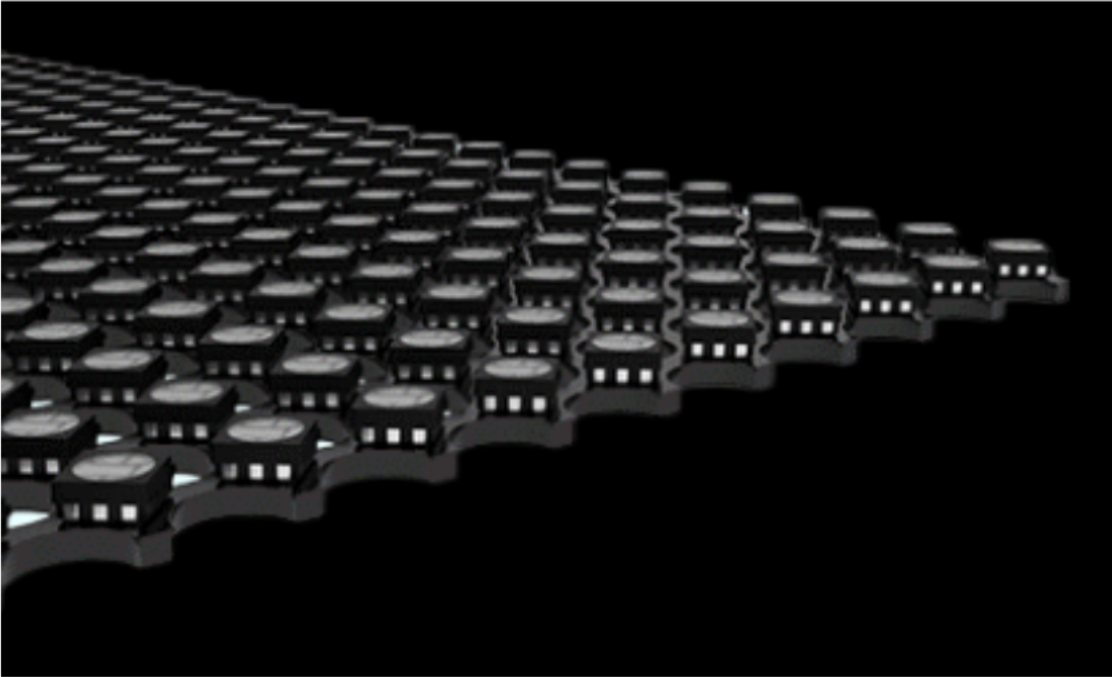

Keep the view open

Transparent LED content can share the glazed area with views into the space behind it. Transmittance varies by pitch.

Plan the glass interface

Confirm the usable glass area, attachment method, cable routing and approved cut positions for the selected film format.

Configuration at a glance

Configuration	P2.97	P3.91	P6.25
Transmittance	>80%	>80%	>90%
LED surface thickness	≤ 2 mm		
Module height	250 mm		
Installation	Indoor glass integration		

Module widths and brightness depend on the chosen version. The control assembly is additional.

Plan your HoloFix Film project

Project context

Share glazing dimensions, divisions and photographs from both sides.

Technical needs

Specify viewing distance, ambient light and the amount of transparency needed.

Details to confirm

Confirm permitted cable routes and attachment conditions before production.

led@turingled.com / [WhatsApp +86 15014067656](https://www.whatsapp.com/channel/00299100000000000000)