


Perimeter 960

A square cabinet for perimeter layouts.

P8 LED display with protective padding
and concealed cable connections.

Stadium perimeter

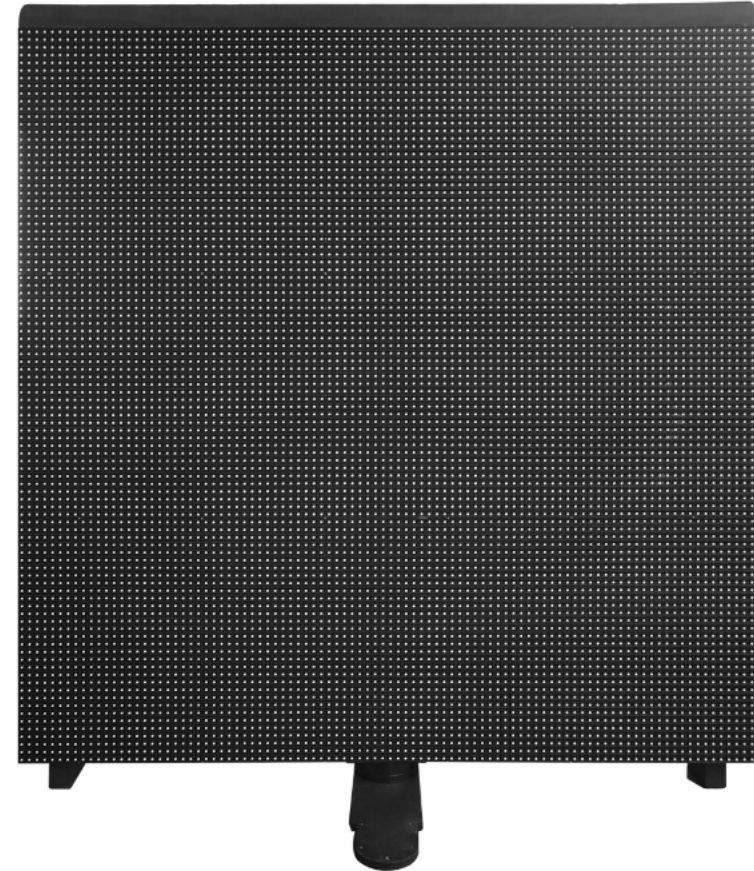

Connect, support and service



Perimeter protection

The soft mask and protective top pad are part of the cabinet design. Keep the display face and cable routes clear.

Repeatable assembly

Fast cabinet locks and concealed connections support repeated installation. Service is available from the front or rear.

Configuration at a glance

Parameter	P8 configuration
Cabinet W × H × D	960 × 960 × 87 mm
Cabinet pixels	120 × 120
Cabinet weight	29 kg
Brightness / refresh	≥6,500 nits / 7,680 Hz
Protection / service	IP66 / front and rear

Six 480 × 320 mm modules per cabinet, arranged 2 wide × 3 high.

Plan your Perimeter 960 project

Project context	Share the total display length and available installation depth.
Technical needs	Confirm viewing distance, content and camera requirements.
Details to confirm	Provide the support, power and service plan for the venue.

led@turingled.com / **WhatsApp +86 15014067656**